Instruction Manual

Wall-Mounted Body Drier
HSD-90103

User Manual – Please read and retain for future reference.

These notes must be read before installation

These instructions are for your safety. Please read through them thoroughly before use and retain for future reference. Failure to follow them could cause injury and/or property damage.

Safety Instruction

This appliance is not intended for use by persons (including children) with reduced physical or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
Children should be supervised to ensure that they do not play with the appliance.
Check the appliance and the supply cord for damage regularly. If the supply cord becomes damaged, it must be replaced by a suitably qualified person using the same rated cable. Do not attempt to make repairs to the appliance yourself, always contact a qualified technician.

1. Check if the voltage indicated on the appliance corresponds to the local voltage before you connect the appliance.
2 Only use this appliance for its intended use as described in this manual.
3 Always switch the power off on the appliance using the on/off switch.
4 Isolate the unit before carrying out maintenance.
5 Store the product out of reach from children.
6 Clean the appliance after use to avoid the accumulation of grease and other residues.
7 Never use this appliance near water in bathtubs, basins or other vessels, if installed in a bathroom it must be installed by a Qualified Electrician.
8 Make sure that the air inlet grills at the bottom of the appliance are never obstructed.
10 Never allow the supply cord to touch hot surfaces.
11 Do not direct the airflow towards the eyes or other sensitive areas.
12 Do not use the appliance with wet hands and keep away from sources of water.
13 Do not use the Body drier for any purpose other than drying body.
14. Do not use the appliance if any malfunction is noted or if the power cable is damaged in any way.
15. The elements used to pack the appliance (plastic bags, cardboard box, etc…) must not be left within reach of small children, as they are a potential source of danger.

IMPORTANT
This appliance complies with safety requirements for electrical equipment.
This body drier is fitted with a timer controller. It will stop automatically if it runs for 18 minutes. After hanged the holder again it will start up again.
Before use, make sure that the appliance air inlet grills are perfectly clean.
The manufacturer will not be considered liable for any damage to persons or

property deriving from failure to comply with the above recommendations, or improper use of the drier.

INTRODUCTION

Thank you for choosing this Body drier. This product is designed to meet the most stringent quality, performance, and safety requirements. This guide aims to improve your understanding of your new body drier by providing simple and informative instructions.

UNPACKING

Carefully unpack the product using the following procedure:

- Carefully lift the parts/product out of the box
- Carefully remove the protective wrapping from the parts

IDENTIFICATION

(Image for illustrative purposes only)

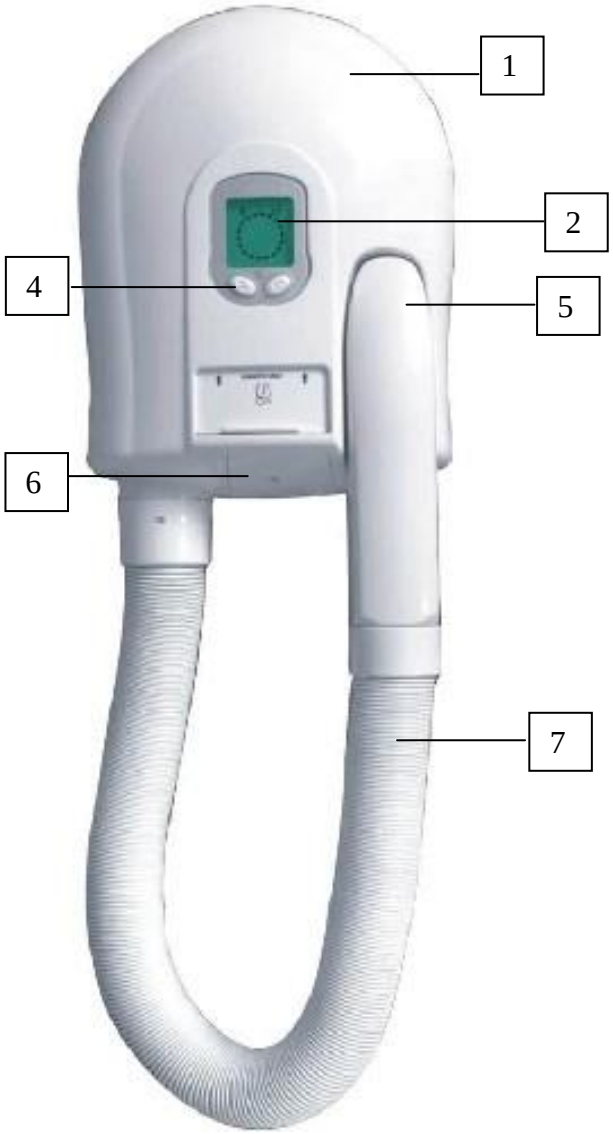

Fig. 1a

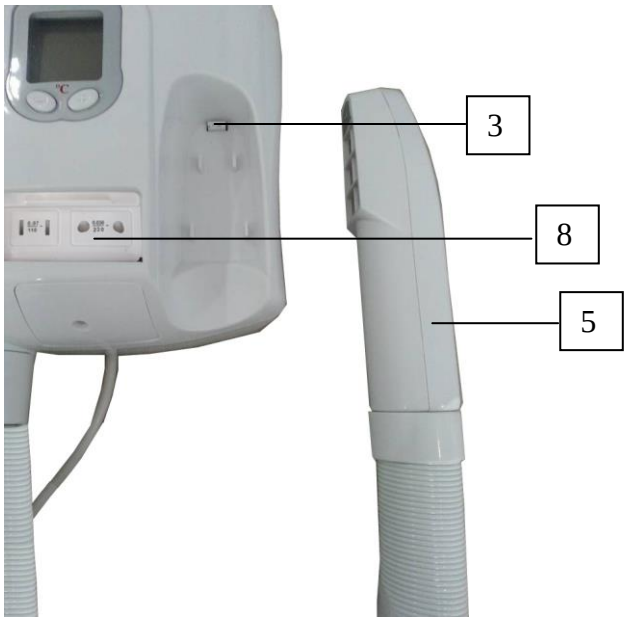

Fig. 1b

Fig. 1c

1. Drier body
2. LED
3. Micro Switch
4. Temperature Control knob
5. Wind-outing handle
6. Terminal cover
7. Blast Hose
8. Shaver socket

WARNING:

If installed in a bathroom, this unit must be installed by a Qualified Electrician.

TOOLS REQUIRED

- Philips screw driver
- Electric drill
- 6mm masonry bit
- Pencil
- Spirit level

FIXINGS SUPPLIED
2 x Wall plug
2 x Screw
1 x Hanger

PARTS SUPPLIED
1x Body drier unit

INSTALLATION

IMPORTANT MOUNTING INSTRUCTIONS
1. When wall mounting the product, always check that there are no water, gas or electrical cables/pipes within or behind the wall.
2. Ensure the mains supply is switched off before commencing any electrical installation.
3. The electrical installation should be carried out in accordance with current wiring regulations and installed by a qualified electrician.
4. Ensure your mains supply rating corresponds with that stated on the rating label fixed to the Body drier.
5. The Body drier is double insulated and does not require an Earth (ground) connection.
6. The Body drier must be fixed so that the base unit and the hand held part, when fully extended, is out of reach of a person taking a bath or shower.
7. Connection of the unit to the electrical supply by fixed wiring should be made with cable suitable for a 13A loading.
8. When the unit is to be permanently connected to the fixed wiring, a suitable means for all-pole disconnection (contact separation of at least 3mm) should be incorporated (e.g. a switched fuse spur fitted with a 13A rated fuse)

WALL MOUNTED

1. Install The Body Drier with plug connected wire (Fig. 2)

Note: Use a spirit level to ensure the holder is installed accurately.
1. Remove the screw located at the bottom of the Terminal cover. Then remove the cover.
2. Using an electric drill and a 6mm masonry bit, drill holes at the marked points according to the dimension show in Fig. 2.
3. Insert two wall plugs. Then fix the hanger to top hole with the screw.
4. Align installation body drier to the hanger and screw into the position with the screw on bottom hole. Then screw in the terminal cover to body drier.
5. Connect with general power.

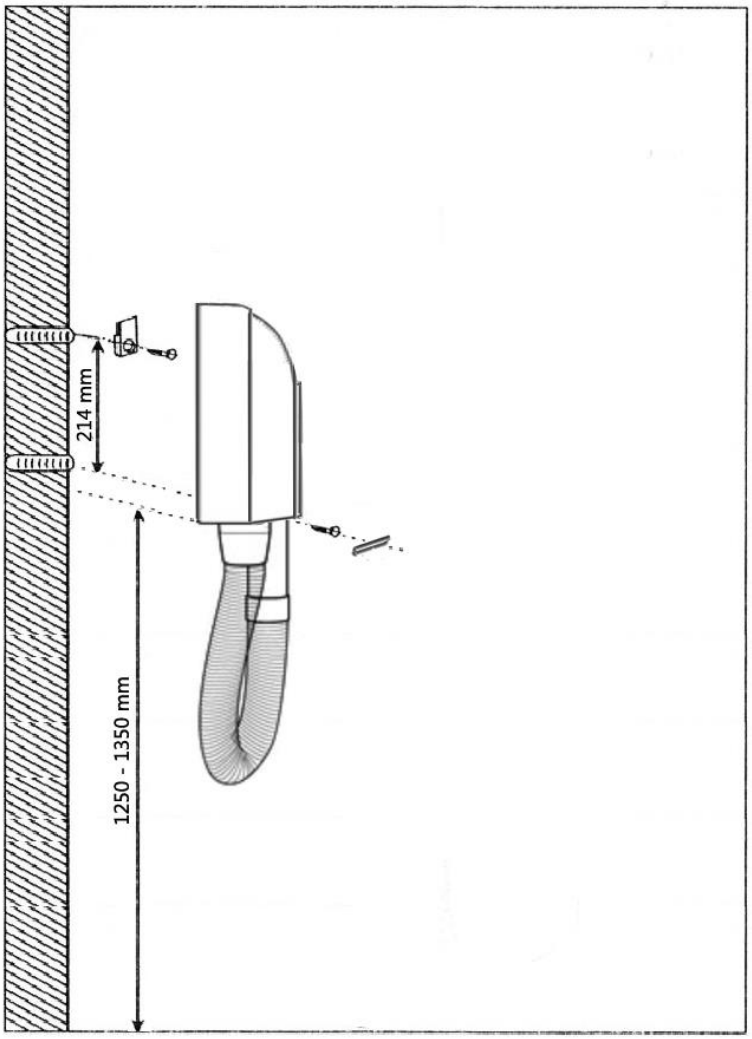

Fig. 2

2. Install The Body Drier without plug-connected wire

1. Follow the above points 1 - 5.
2. Connect the mains cord the terminals.

Technical Information

Wall-mounted Body Drier
Model: HSD-90103
Rated Voltage: 220-240V~ 50Hz
Rated Power: 750W
Main Features: Automatic Turn On/Off
Long Working: 18 Minutes will be shut off automatically
Wind Temperature: 40 - 80 ^{o}C
Shaver socket: 230V~ / 0.05A & 115V~ / 0.07A

CE

Protection category II

Operation

IMPORTANT
Before using, check the intake grille for possible blockage by fluff, hair, etc.

DRYING
To start the Body drier, remove the wind-out handle from its housing. The body drier will be shut off automatically after 18 minutes working.
To press the temperature controlling button to change the wind temperature. The sign "+" is for temperature increase. The sign "-" is for temperature decrease. The wind temperature is shown on LED.
To shut off the body drier, put back the wind-out handle to the housing.

The body drier is fitted with 230V~, 50Hz and 115V~, 50Hz shaver sockets. These sockets, which can be accessed by lifting a special protection flap (fig. 1b), must only be used to run or recharge electric shavers (max 20VA).
IMPORTANT: never connect other appliances such as electric coffee machines, heaters, etc. to these sockets. The body drier is fitted with an electric timer which turns the appliance off automatically after a preset time (18 mins). To turn it back on again, simply replace the wind-out handle in its housing and then remove it again.

CARE
This appliance should be cleaned with a dry cloth. Never rinse the appliance with water.
Check the air intake grill regularly, keeping it clear of dust, fluff, hair etc.

Cable Connecting with Terminal
In the case of the coloured cable wires not corresponding with the markings identifying the terminal follow these steps
1. Connect BROWN wire to terminal "L" (or coloured red)
2. Connect BLUE wire to terminal "N" (or coloured black).

Important!
Cut off power supplier when connecting the cable to terminal.

CONFORMITY WITH DIRECTIVES
Conforms with relevant European Directives

ENVIRONMENTAL PROTECTION

• (WEEE) Waste Electrical and Electronic Equipment
Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.
• This appliance complies with the RoHS directive which restricts the use of certain hazardous substances in electrical and electronic equipment. This directive bans the placing on the EU market of new electrical and

electronic equipment containing more than agreed levels of lead, cadmium, mercury, exavalent chromium, polybrominated biphenyl (PBB) and polybrominated diphenyl ether (PBDE) flame retardants.

Please read the following carefully

ACL Group (Intl) Ltd. and/or it's distributor has provided the parts list and assembly diagram as a reference tool only. Neither ACL Group (Intl). Ltd. or its distributor makes any representation or warranty of any kind to the buyer that he or she is qualified to do any repairs or replace any parts of this product. ACL Group (Intl) Ltd. and its distributor expressly state that all repairs or parts replacement should be done by certified or licensed technicians. The buyer assumes all risk and liability arising out of his or her repairs or parts replacement to the original product.